


FRONT AXLE
Capacity 3 pints
TRACTA JOINTS, SWIVEL PINS
and FRONT HUBS
Capacity 1 pint each
UNIVERSAL THUBAN 90
Check levels every 3,000 miles
Drain and refill 9,000 miles

MAIN GEARBOX
Capacity 2½ pints
TRANSFER BOX
Capacity 4½ pints
UNIVERSAL THUBAN 90
Check levels every 3,000 miles
Drain and refill 9,000 miles
Drain flywheel housing 1,000 miles

REAR AXLE
Capacity 3 pints
UNIVERSAL THUBAN 90
Check levels every 1,000 miles
Drain and refill 9,000 miles

TYRE INFLATION GUIDE

Size	lbs. sq. inch	
	Front	Rear
6.00 x 16	25	25
7.00 x 16	25	25

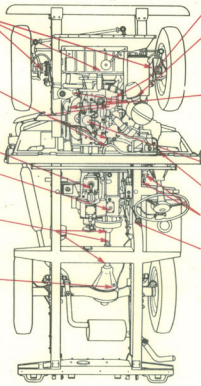

DYNAMO 12,000 miles
MARFAK MULTI-PURPOSE 2 (see note D)
AIR CLEANER 3,000 miles
Advanced **HAVOLINE 30** (see note C)

CRANKCASE
Capacity 10 pints
Filter 1 pint
Advanced **HAVOLINE**
Above 32°F. S.A.E.30
Below 32°F. S.A.E.20W
HAVOLINE SPECIAL 10W/30
All Temperatures above -10°F
Drain and refill 3,000 miles
EXTERNAL FILTER
A.C. Type 25.1
Renew every 6,000 miles
(see special NOTE)

DISTRIBUTOR 3,000 miles
Advanced **HAVOLINE 20/20W** (see note E)
STEERING BOX 3,000 miles
UNIVERSAL THUBAN 90
CLUTCH AND BRAKE PEDALS
BRAKE FLUID RESERVOIR (weekly)
GIRLING CRIMSON BRAKE FLUID

NOTES :
ENGINE LUBRICATION. Under good road or clean field conditions, first oil change at 750 miles or 25 hours. Subsequent changes as shown above. Under severe conditions of mud or dust, oil changes and filter renewals must be more frequent to ensure good engine life. The appearance of the oil must not be relied on. Remove and wash breather filter regularly.
A. STEERING BALL JOINTS are packed and require no periodic attention. Repack with **MARFAK** as required.
B. SHOCK ABSORBERS—Woodhead-Monroe—no regular service required.
C. AIR CLEANER—Remove for cleaning. Empty bowl, wash out and refill to level with engine oil (2 pints). Wash gauze in petrol and re-oil. Under good conditions—each sump change: dusty field work—daily. Advanced **HAVOLINE 30**

D. DYNAMO—Half fill cap. **MARFAK MULTI-PURPOSE 2**
E. DISTRIBUTOR—Remove Rotor, Oil Cam, Spindle and Automatic Advance Mechanism. Advanced **HAVOLINE 20/20W**.
F. POINTS REQUIRING NO LUBRICATION—Clutch Withdrawal Bearing, Spring Shackles and Water Pump Bearings
G. COOLING SYSTEM CAPACITY—17 pints
H. PETROL TANK CAPACITY—10 gallons

SERVICED FROM ABOVE



LAND ROVER 1951 -
PETROL or DIESEL MODELS

